



AVI – Optimize your sensor



# 10.1" Rugged Multifunction Display

## Overview

AVI's D102X series modular rugged multifunction display is a 1920x1200 resolution, 8-bit color, high-contrast, high-brightness unit that provides impressive image clarity. With a 10.1" diagonal viewing area, this light-weight 1.7 Kg (3.8 lbs) unit provides a small foot print of only 264.8mm x 180.2mm x 28mm (10.4" x 7.1" x 1.1"). The D102X series features hardened cover glass with Projective Capacitive (PCAP) touch screen, direct sunlight readable, 3G-SDI input and output, up to sixteen selectable video layouts for the four 3-G SDI inputs, fully IP68 rated and many other outstanding features.

AVI's new range of displays use a modular approach to provide higher reliability, lower costs, and greater installation flexibility. Each display system consists of three modules: the LCD Module, the Display Electronics Unit (DEU), and the User Interface Module (UIM).

The LCD Module contains only the LCD and backlight driver. This removes most of the heat and noise generating electronics allowing extended operating temperatures, longer LCD life, and lower weight. Mounting is provided by either four front panel mounts, three mount points on each side, or a 100mm VISA mount on the back.

The DEU contains the LCD driver, DC/DC converter and video processors. Connection to the LCD Module is via an AVI provided Embedded DisplayPort (eDP) cable or can be directly attached to the back of the LCD Module. The DEU can



Figure 3 – Display Electronics Module.

be placed up to 2 meters (6.5') from the LCD Module. This facilitates various options for mounting the LCD Module in tight locations or on articulated display mounts.



Figure 1 - LCD Module Front.



Figure 2 - LCD Module Back.



# 10.1" Rugged Multifunction Display

AVI's innovative PCAP based User Interface Module (UIM) is also provided as a separate module. Various module configurations are available. The unit can be panel mounted



Figure 4 – User Interface Module.

wherever the user wants it or can be attached to any of the mounts on any side of the LCD Module. Communication to the UIM is via RS485. The UIM can be daisy-chained up to seven units so multiple display configurations can be accommodated.



Figure 5 – LCD Module with DEU attached.

## Standard Features


- 1920x1200 resolution with 8-Bit color (RGB) for pristine images
- Optically bonded LCD and AR coated cover glass for additional strength and higher contrast
- Sealed enclosure (IP68) for extreme environments
- Four 3G SDI video Input and active image output
- Supports all SMPTE standard resolutions and frame rates through 425M
- Frames and enclosures milled from aircraft aluminum
- Direct sunlight viewable ( $\geq 1000 \text{ cd/m}^2$ )

- PCAP Function buttons that will never wear out
- VESA Mount, Panel Mount, or 3-point mounts on all sides provides flexible mounting options
- -30 C° to 70 C° operation
- Heat dissipating frame and enclosures
- Attached or remotely located electronics module
- Attached or panel-mount user interface module
- Lightweight LCD module for flexible mounting options
- Quad image processing with up to 16 image layouts
- Extreme shock and vibration capable
- 9 – 36 V DC Power
- MIL-STD circular power, signal, and Ethernet connectors
- Three-year warranty

## Options

- NVGS Class B
- Touch Screen

## Selectable Image Configurations

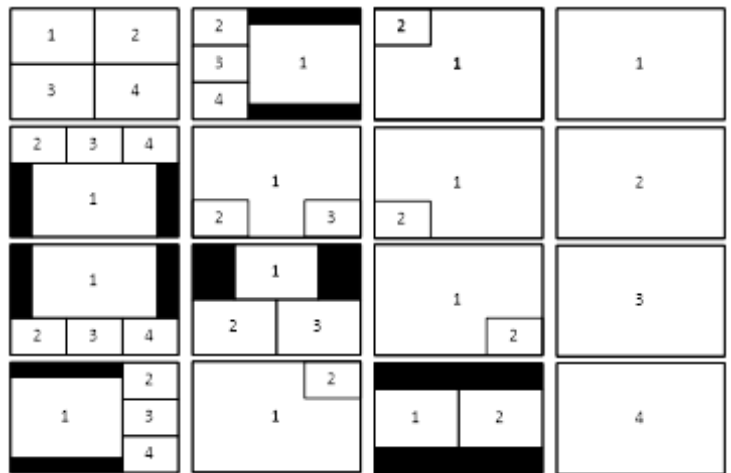



# 10.1" Rugged Multifunction Display

<p><b>Video Inputs</b></p> <ul style="list-style-type: none"> <li>• SD, HD, and 3-G SDI <ul style="list-style-type: none"> <li>○ Connector type – BNC</li> <li>○ Coax 75Ω</li> <li>○ Input equalization &gt; 100m (Belden 1694A)</li> </ul> </li> </ul> <p><b>Video Outputs</b></p> <ul style="list-style-type: none"> <li>• SD, HD, and 3-G SDI (Active Image) <ul style="list-style-type: none"> <li>○ Re-clocked, 10 bit, 4:2:2 color encoding</li> <li>○ Connector type – BNC</li> <li>○ Coax 75Ω</li> </ul> </li> </ul> <p><b>Supported SDI Video Formats</b></p> <ul style="list-style-type: none"> <li>• 3G – SMPTE 424M <ul style="list-style-type: none"> <li>○ 2.97 and 2.967Gb/s</li> <li>○ 1080p@60/59.94/50Hz</li> <li>○ Format SMPT 425M Level A</li> </ul> </li> <li>• HD – SMPTE 292M/274M/296M <ul style="list-style-type: none"> <li>○ 1.485 and 1.435Gb/s</li> <li>○ 1080i@60/59.94/50Hz</li> <li>○ 1080p@30/29.97/25/24/23.98 Hz</li> <li>○ 720p @60/59.94/50/30/29.97/25/24/23.98 Hz</li> </ul> </li> <li>• SD – SMPTE 259M <ul style="list-style-type: none"> <li>○ 270Mb/s</li> <li>○ 625i@50Hz</li> <li>○ 525i@59.94Hz</li> </ul> </li> </ul>	<p><b>LCD Specifications</b></p> <ul style="list-style-type: none"> <li>• Screen Diagonal 256.42mm [10.1 in]</li> <li>• Resolution 1920x1200</li> <li>• Pixel Pitch 0.11325mm</li> <li>• Pixel Arrangement R.G.B Vertical Stripe</li> <li>• Display Mode Transmissive Normally Black</li> <li>• White Luminance Max 1300 cd/m<sup>2</sup></li> <li>• Contrast Ratio ≥ 800:1</li> <li>• Response Time 25ms (typical, on/off)</li> <li>• Supported Colors 16.7 M, 24 bit (8-Bit RGB)</li> <li>• Viewing Angles 85L, 85R, 85U, 85D typical</li> <li>• Backlight Dual CH hi-bright LED NVGS Class B (option)</li> <li>• Touch Screen Capacitive (option)</li> </ul>
<p><b>Model Numbers</b></p> <ul style="list-style-type: none"> <li>• LCD Module: D102-00 No options</li> <li>• LCD Module: D102-01 Touch Screen</li> <li>• LCD Module: D102-10 NVGS</li> <li>• LCD Module: D102-11 NVGS and Touch Screen</li> <li>• DEU Module: DEU011-100 Mounted to LCD</li> <li>• DEU Module: DEU011-101 Unmounted*</li> <li>• LCD to DEU Cable: DC05 0.5 meter cable</li> <li>• LCD to DEU Cable: DC10 1.0 meter cable</li> <li>• LCD to DEU Cable: DC20 2.0 meter cable</li> <li>* Cable required</li> </ul>	<p><b>DEU I/O</b></p> <ul style="list-style-type: none"> <li>• RS-232*, RS-422, USB 2.0 <ul style="list-style-type: none"> <li>○ Connector Type 2M805-005-07ZNU12-26</li> </ul> </li> <li>• 1000BaseT Ethernet <ul style="list-style-type: none"> <li>○ Connector Type 2M805-005-07ZNU9-10</li> <li>○ * If touch Screen out put selected as RS-232, this is not available</li> </ul> </li> </ul>
<p><b>Power</b></p> <ul style="list-style-type: none"> <li>• +9 to +36V DC</li> <li>• 0.90 A @ 28V DC (full brightness)</li> </ul>	<p><b>Environmental</b></p> <ul style="list-style-type: none"> <li>• Operating Temp Low -30°C DO-160G Cat B2</li> <li>• Operating Temp High +70°C DO-160G Cat B2</li> <li>• Short Term Op Temp Low -45°C DO-160G Cat B4</li> <li>• Short Term Op Temp High +75°C DO-160G Cat B4</li> <li>• Ground Survival Low Temp -55°C DO-160G Cat B4</li> <li>• Ground Survival High Temp +85°C DO-160G Cat B4</li> <li>• Temp Variation 5C° per minute DO-160G Cat B</li> <li>• Humidity 38C° to 95@ 50C° DO-160G Cat A</li> <li>• Operational Shock 6g @ 11ms, 20G DO-160G Cat B</li> <li>• Vibration Random, 10-2000Hz DO-160G Cat U, U2</li> <li>• Explosion Proofness* MIL-STD-810G Method 511.6</li> <li>• Waterproofness Spray Proof DO-160G Cat R</li> <li>• Magnetic Effect DO-160G Cat A</li> <li>• Power Input* DO-160G Cat A</li> <li>• Voltage Spike 2x Line Voltage DO-160G Cat B</li> <li>• EMI/EMC Sec 18, 19, 20, 21 DO-160G Cat B, CC, R, M</li> <li>• ESD* DO-160G Cat A</li> </ul>
<p><b>Dimensions and Weight</b></p> <ul style="list-style-type: none"> <li>• 264.36mm [10.4in]x180.2mm [7.1in]x27.56mm [1.1in]</li> <li>• 1.7kg [3.8lbs]</li> </ul>	<p>To be DO-160 Tested</p> <ul style="list-style-type: none"> <li>• Ingress Rating IP68</li> <li>• Altitude Operating 50,000ft DO160G Cat D1</li> </ul>



# 10.1" Rugged Multifunction Display

